

Manual Insertion Reader

KDR-3000 Series

Overview:



Reads single or dual track magnetic stripe with ISO standards. This reader is especially useful in gaming applications and for a host of applications where space is limited. It functions reliably over a various range of operating speed and operation is extremely simple. The reader is intended to be mounted onto the front panel of the user's terminal or other equipment.

Features:

- Proven & Tested to Last a Minimum of 1,000,000
- ISO-1,2,3 Single or Dual Track Read
- Low Power Consumption: Max. 8mA
- TTL, RS-232C and USB Interface
- GDS Protocol is Available (KDU-3907 only)
- Card Present Switch
- Power Supply: DC 5V ± 5%

Applications:

- ATM / Cash Dispenser
- Vending Machine
- Kiosk (information & payment)
- POS System

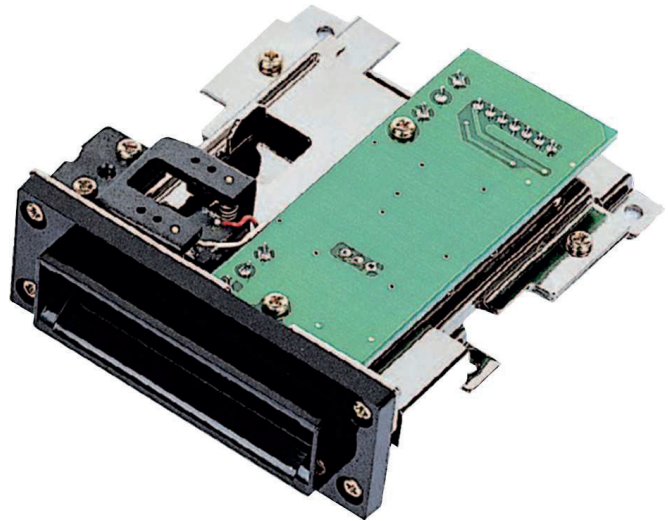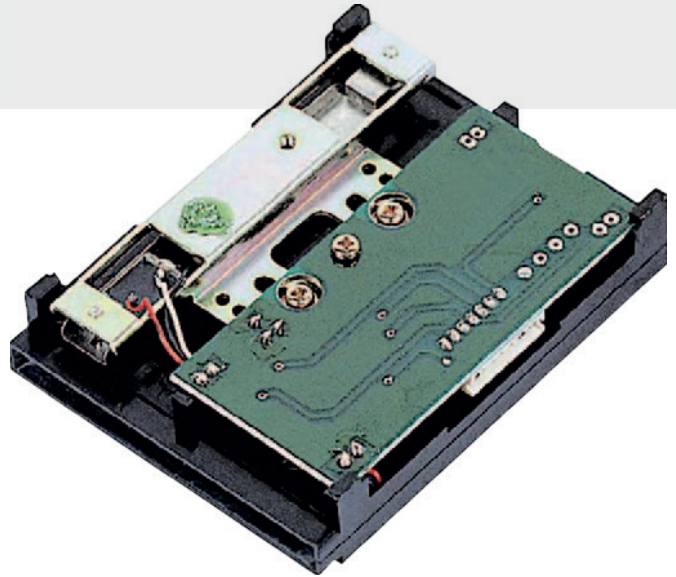

Model Name Configuration:

KD			3		1: ISO-1 track	
	R: TTL M: RS-232C U: USB			7: Metal Housing / Micro Switch 8: Plastic Housing / Micro Switch 9: Customized	2: ISO-2 track	0: Default
					3: ISO-3 track	
					5: ISO-1&2 track	
					6: ISO-2&3 track	